# CABINET CORE

Walk wardrobe

11/1/2026, 3:26:31 AM

Not assigned materials: 11 lines. Assign them in Cabinet Core, Materials, before ordering.

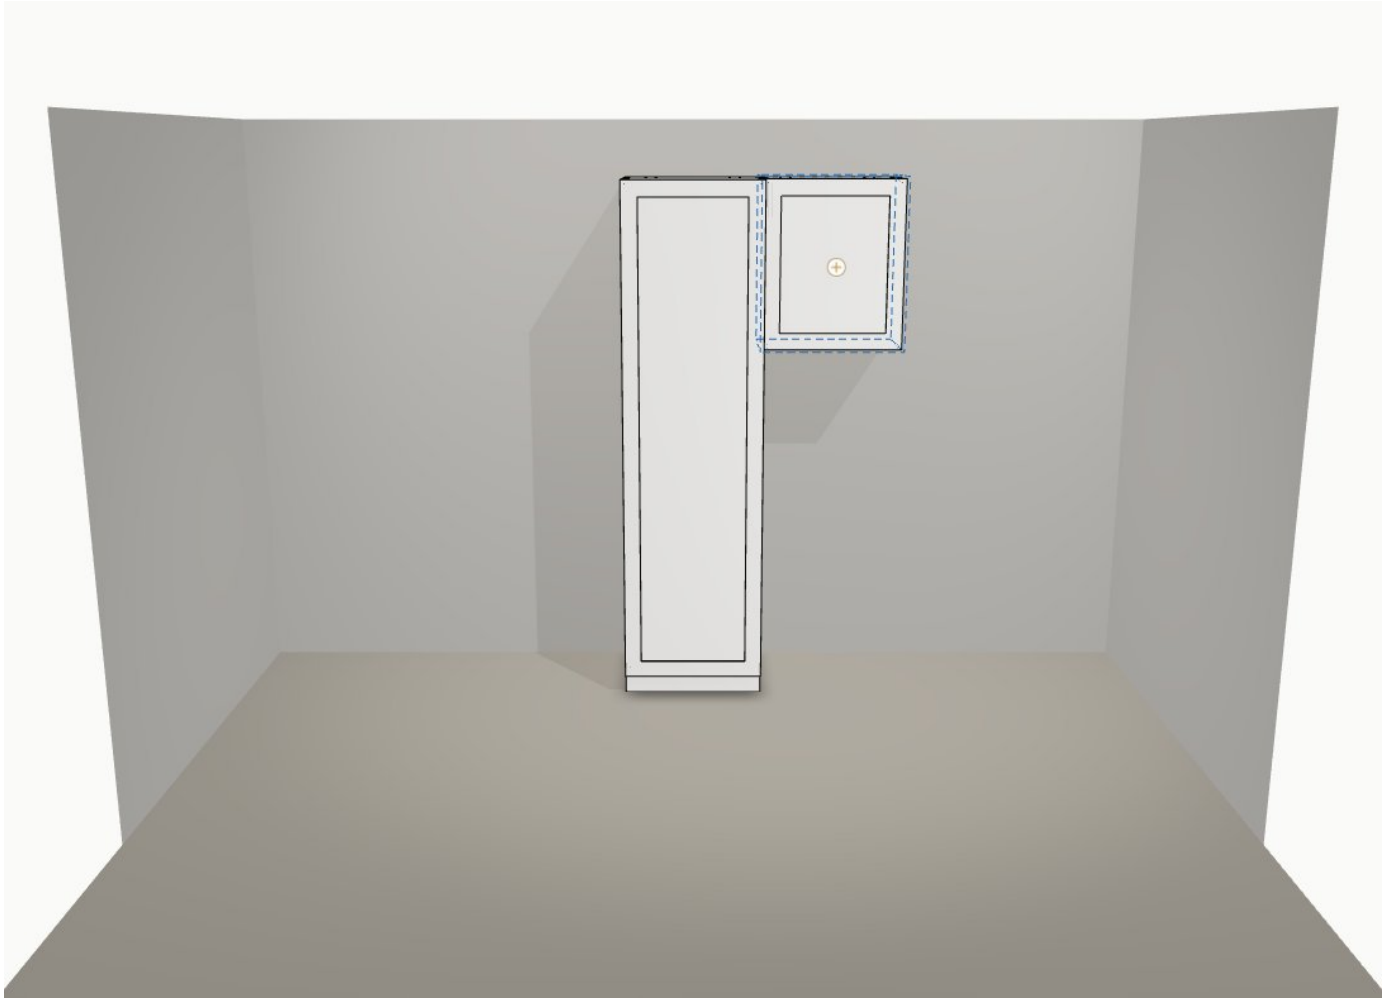

2 unit(s) · 13 pieces · board 5.688 m² · fronts 1.803 m² · edging 8.00 m

| Unit | Panel | W | H | Qty | Edge | m² |
|---|---|---|---|---|---|---|
| W01 | BUL | 550 | 2150 | 1 | < | 1.183 |
| W01 | BUR | 550 | 2150 | 1 | > | 1.183 |
| W01 | TOP | 564 | 550 | 1 | > | 0.310 |
| W01 | BOTTOM | 564 | 550 | 1 | > | 0.310 |
| W01 | BACK | 600 | 2150 | 1 | | 1.290 |
| W01 | PLINTH | 640 | 140 | 1 | ^v | 0.090 |
| W01 | W01-F | 597 | 2150 | 1 | <>^v | 1.284 |
| WU01 | BUL | 382 | 720 | 1 | < | 0.275 |
| WU01 | BUR | 382 | 720 | 1 | > | 0.275 |
| WU01 | TOP | 564 | 382 | 1 | > | 0.215 |
| WU01 | BOTTOM | 564 | 382 | 1 | > | 0.215 |
| WU01 | BACK | 600 | 720 | 1 | | 0.432 |
| WU01 | WU01-F | 597 | 720 | 1 | <>^v | 0.430 |

## Finish

Carcass — Broken white · #F2F0EC

Fronts — Broken white · #F2F0EC

## Materials

side, 2.915 m², Not assigned materials
top, 0.526 m², Not assigned materials
bottom, 0.526 m², Not assigned materials
back, 1.722 m², Not assigned materials
plinth, 0.090 m², Not assigned materials
front, 1.713 m², Not assigned materials

## Hardware

Hinges — 6 pcs · 6 per door × 1 · 155° · CLIP top BLUMOTION · nickel · 45588965 · Blum Clip top Blumotion 110 hinge · 22.80
Legs — 4 pcs · 100 mm, Not assigned materials
AVENTOS HK top lift mechanism set — 1 pcs · AVENTOS HK top 22K2700 (2 mechanisms) · 600 x 720 mm cabinet, 597 x 720 x 18 front · 5.2 kg · LF 3714,
AVENTOS HK top cover cap set — 1 pcs · AVENTOS HK top cover cap set 22K8000, Not assigned materials
AVENTOS front fixing bracket set — 1 pcs · Front fixing bracket set 20S4200 (2 pcs, wooden fronts) · holes marked with ZML.2200, not bored, Not assigned
Wall hangers — 2 pcs · #5, Not assigned materials

Total: not a price, 11 lines without a material